QUANTIFI PHOTONICS®
A Teradyne Company



VOA

VARIABLE OPTICAL ATTENUATOR

SPECIFICATION SHEET


quantifiphotonics.com

The VOA's built-in power meter and power stabilization function lets you set and maintain the output power stability even when the input power fluctuates. You'll get reliable and repeatable test results, each and every time.




Wide coverage of operational wavelengths

One versatile tool to cover a wide variety of applications.




Built in power monitoring capability

Eliminate the need for an extra power meter with built-in power monitoring capability.



SM, PM and Multimode options

Available in your choice of fiber types to fit into your existing optical setup



Constant power output mode

With the built-in closed-loop power monitoring, the VOA can operate in the constant power output mode to stabilize fluctuating input power.




Fast attenuation speed

Fast attenuation speed minimizes the down time during changes in attenuation settings to shorten your overall test time.



Simple, intuitive operation with COHESIONUI™

cohesionUI makes it simple to control the VOAPXIe from your PC or mobile device. Its cutting-edge design offers a sleek modern interface, cross device compatibility, customizable views and remote network access.



Low insertion loss

Maximise your power budget with low insertion loss.




Seamless PXI integration

Take advantage of PXI's integrated triggering and synchronization capabilities across electrical and optical instruments.

Simple, intuitive control with COHESION**UI**™

COHESION**UI** makes it simple to control our PXI or MATRIQ instruments from a PC, tablet or smartphone. Its cutting-edge design offers a sleek modern interface, cross device compatibility, customizable views and remote network access.

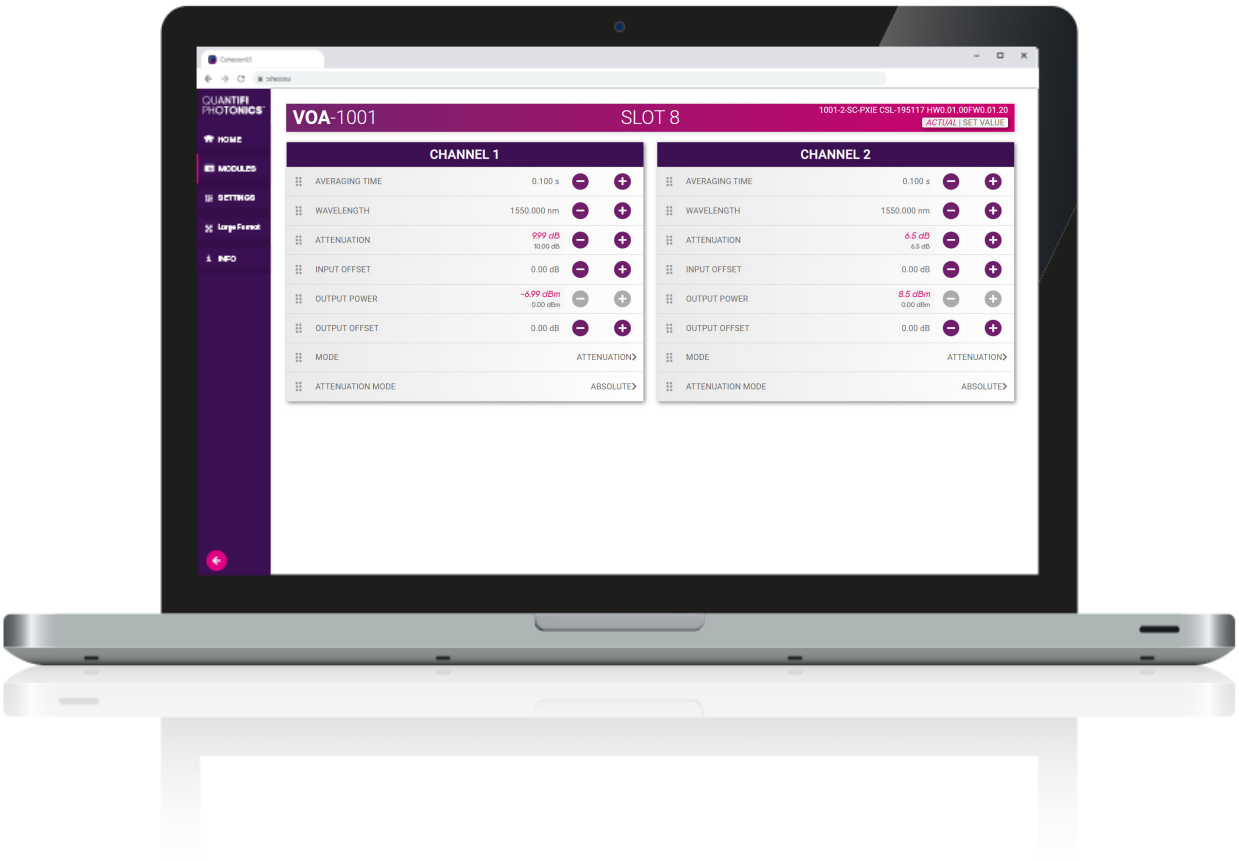


TARGET APPLICATIONS

- Transceiver stress testing
- Receiver sensitivity testing
- Loss simulation
- Optical power budget analysis
- Instrument power calibration
- EDFA gain linearity test

POWER MODE

Power stability

This graph illustrates the power output stability of < 0.005 dB RMS at various power setpoints.

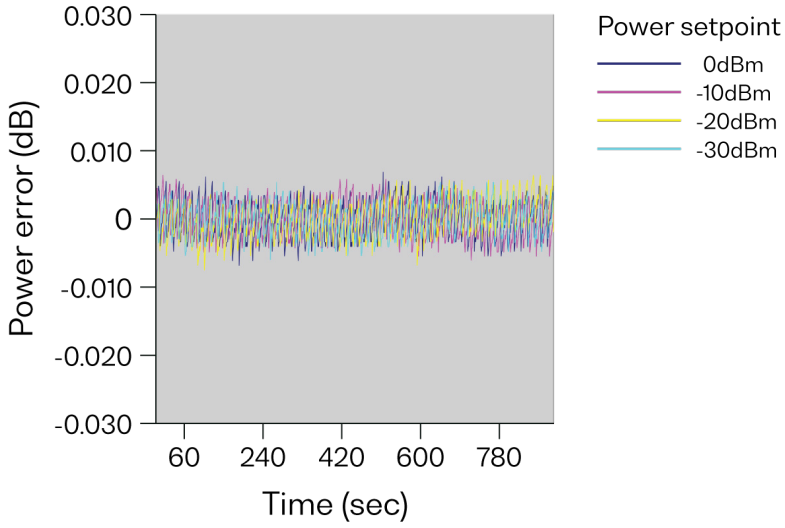

CHOOSE YOUR FORM FACTOR

PXIE - MODULAR

Our expanding range of PXIe optical test solutions are used by customers in mixed-signal test and measurement systems, reducing complexity, lowering the cost of test and accelerating time to market.

- Multi vendor, open standard with over 2500 PXI modules available
- Advanced timing and synchronization capabilities across instruments
- Low latency, high performance processing and fast data throughput
- Design and build scalable, high channel count systems
- Small footprint and lower power consumption



MATRIQ – COMPACT & PORTABLE


The MATRIQ series provides the same high-performance test capabilities of our PXIe modules in an compact benchtop design. MATRIQ instruments are simple to setup and easy to operate, making them the perfect choice for your optical lab or test bench.

- Same performance and control as our PXIe modules
- Plug and play with USB or Ethernet connectivity
- Control via the web-based GUI, COHESIONUI or SCPI commands
- Compact and portable design saves benchtop space



PXI – MODULAR



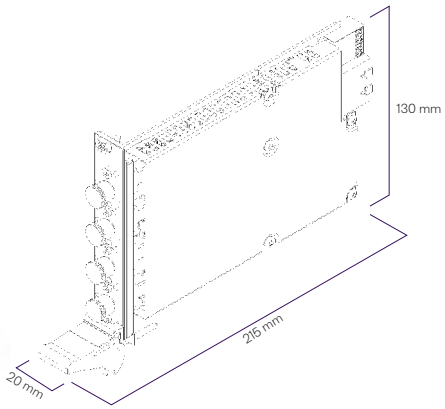



VOA-1001-2-FC-PXIE

MATRIQ – COMPACT & PORTABLE



VOA-1001-2-FC-MTRQ

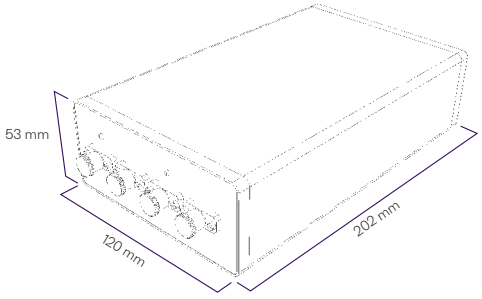

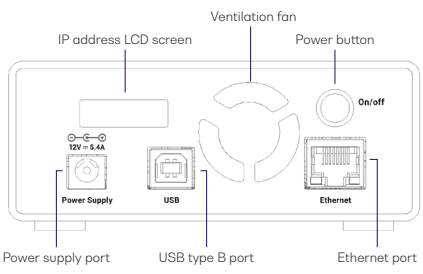

General Specifications	PXI	MATRIQ
Bus connection	PXIe	USB and Ethernet
PXI slots	1	-
Optical connector type	FC/PC, FC/APC, SC/APC, SC/PC [1]	FC/PC, FC/APC, SC/APC, SC/PC
Number of channels	2	2
Dimensions (HxWxD)	130 mm x 20 mm x 215 mm | 5.1" x 0.8" x 8.5"	53 x 120 x 202 mm | 2.1 x 4.7 x 8.0 inches
Weight	~ 1 kg | ~2.2 lbs	~ 1.1 kg | ~ 2.4 lbs
Operating temperature range	5 °C to 45 °C | 41 °F to 113 °F	5 °C to 40 °C | 41 °F to 104 °F
Storage temperature range	-40 °C to 70 °C | -40 °F to 158 °F	-40 °C to 70 °C | -40 °F to 158 °F

Power Specifications	PXI	MATRIQ
AC input voltage range	Please refer to the latest PXI Express Hardware Specifications published by the PXI Systems Alliance.	100 to 240 VAC
AC input current		1.3A (115 VAC), 0.9A (230 VAC)
AC frequency range		47 to 63 Hz
DC output voltage		12 V
DC output current max		5.41 A
Dimensions (LxWxH)		4.58 x 2.06 x 1.23" (116.3 x 52.4 x 31.3 mm)

Single mode fiber

Model Number	1001
	CWDM8
Wavelength range	1260 nm to 1650 nm
Fiber type	SMF-28
Power control range	-50 to +20 dBm
Damage level	+23 dBm
Insertion loss [3]	< 1.3 dB at 1310nm < 2.0 dB for all others
WDL	< 0.02 dB/nm
Return loss [3]	> 45 dB
Warm-up time	< 20 mins

Attenuator	1001
Calibration wavelengths	1271 nm, 1291 nm, 1311 nm 1331 nm, 1351 nm, 1371 nm 1391 nm, 1411 nm 1490 nm 1550 nm
Attenuation range (Typical) [5]	> 46 dB
Attenuation range (Guaranteed) [5]	> 40 dB
Resolution	0.01 dB
Attenuation speed	0.1 to 1000 dB/s

VOA TECHNICAL SPECIFICATIONS

Power meter	1001
Calibration wavelengths	1271 nm, 1291 nm, 1311 nm 1331 nm, 1351 nm, 1371 nm 1391 nm, 1411 nm, 1490 nm 1550 nm
Polarization dependent responsivity [2,3]	< 0.2 dB
Linearity [2,5]	± 0.1 dB
Total uncertainty [2,3,5]	± 0.34 dB (Typical) ± 0.55 dB (Max)
Averaging time	100 µs to 10 s
Resolution	0.01 dB
Number of trace points	1 to 1024 points per channel
Sample rate for trace	0.01 Hz to 12 kHz

Model Number	1002
	Broadband
Wavelength range	1260 nm to 1650 nm
Fiber type	SMF-28
Power control range	-50 to +20 dBm
Damage level	+23 dBm
Insertion loss [3]	< 2.0 dB
WDL	< 0.02 dB/nm
Return loss [3]	> 45 dB
Warm-up time	< 20 mins

Attenuator	1002
Calibration wavelengths	1310 nm, 1490nm, 1550 nm
Attenuation range (Typical) [5]	> 46 dB
Attenuation range (Guaranteed) [5]	> 40 dB
Resolution	0.01 dB
Attenuation speed	0.1 to 1000 dB/s

Power meter	1002
Calibration wavelengths	1310 nm 1490 nm 1550 nm
Polarization dependent responsivity [2,3]	< 0.2 dB
Linearity [2,5]	± 0.1 dB
Total uncertainty [2,3,5]	± 0.34 dB (Typical) ± 0.55 dB (Max)
Averaging time	100 µs to 10 s
Resolution	0.01 dB
Number of trace points	1 to 1024 points per channel
Sample rate for trace	0.01 Hz to 12 kHz

VOA TECHNICAL SPECIFICATIONS

Model Number	1005
Wavelength range	1520 nm to 1650 nm
Fiber type	SMF-28
Power control range	-50 to +20 dBm
Damage level	+23 dBm
Insertion loss [3]	< 1.3 dB at 1310 nm
WDL	< 0.02 dB/nm
Return loss [3]	> 45 dB
Warm-up time	< 20 mins

Attenuator	1005
Calibration wavelengths	1550 nm
Attenuation range (Typical) [5]	> 46 dB
Attenuation range (Guaranteed) [5]	> 40 dB
Resolution	0.01 dB
Attenuation speed	0.1 to 1000 dB/s

Power meter	1005
Calibration wavelengths	1550 nm
Polarization dependent responsivity [2,3]	< 0.2 dB
Linearity [2,5]	± 0.1 dB
Total uncertainty [2,3,5]	± 0.34 dB (Typical) ± 0.55 dB (Max)
Averaging time	100 µs to 10 s
Resolution	0.01 dB
Number of trace points	1 to 1024 points per channel
Sample rate for trace	0.01 Hz to 12 kHz

Multi mode fiber

Model Number	1102[6]
Wavelength range	800 to 900 nm
Fiber type	MM 50µm core (OM3)
Power control range	-50 to +20 dBm
Damage level	+22 dBm
Insertion loss [3]	< 4.5 dB at 850 nm
WDL	TBC
Return loss [3]	> 20 dB
Warm-up time	< 20 mins

Attenuator	1102[6]
Calibration wavelengths	850 nm
Attenuation range (Typical) [5]	53 dB
Attenuation range (Guaranteed) [5]	>40 dB
Resolution	0.01 dB
Attenuation speed	0.1 to 1000 dB/s
Modal dependence (multimode only)	<0.4 dB at 10 dB attenuation

Power meter	1102[6]
Calibration wavelengths	850 nm
Polarization dependent responsivity [2,3]	< 0.4 dB at 10 dB attenuation
Linearity [2,5]	± 0.25 dB (0 to -30 dBm)
Total uncertainty [2,3,5]	TBD
Averaging time	100 us to 10 s
Resolution	0.01 dB
Number of trace points	1 to 1024 points per channel
Sample rate for trace	0.01 Hz to 12 kHz

Polarization maintaining fiber

Model Number	1301[6]
Wavelength range	1520 to 1570 nm
Fiber type	PM1550
Power control range	-50 to +20 dBm
Damage level	+23 dBm
Insertion loss [3]	< 2.0 dB
WDL	< 0.02 dB/nm
Return loss [3]	> 45 dB
Warm-up time	< 20 mins
Attenuator	**1301[6]**
Calibration wavelengths	1550 nm
Attenuation range (Typical) [5]	> 40 dB
Attenuation range (Guaranteed) [5]	> 35 dB
Resolution	0.01 dB
Attenuation speed	0.1 to 1000 dB/s
Power meter	**1301[6]**
Calibration wavelengths	1550 nm
Polarization dependent responsivity [2,3]	< 0.4 dB at 10 dB attenuation
Linearity [2,5]	± 0.1 dB
Total uncertainty [2,3,5]	± 0.34 dB (Typical) ± 0.55 dB (Max)
Averaging time	100 µs to 10 s
Resolution	0.01 dB
Number of trace points	1 to 1024 points per channel
Sample rate for trace	0.01 Hz to 12 kHz

VOA TECHNICAL SPECIFICATIONS

Model Number	1302[7]
Wavelength range	1290 to 1330 nm
Fiber type	PM1310
Power control range	-50 to +20 dBm
Damage level	+23 dBm
Insertion loss [3]	< 2.0 dB
WDL	< 0.02 dB/nm
Return loss [3]	> 45 dB
Warm-up time	< 20 mins

Attenuator	1302[7]
Calibration wavelengths	1310 nm
Attenuation range (Typical) [5]	> 40 dB
Attenuation range (Guaranteed) [5]	> 35 dB
Resolution	0.01 dB
Attenuation speed	0.1 to 1000 dB/s

Power meter	1302[7]
Calibration wavelengths	1310 nm
Polarization dependent responsivity [2,3]	< 0.4 dB at 10 dB attenuation
Linearity [2,5]	± 0.1 dB
Total uncertainty [2,3,5]	± 0.34 dB (Typical) ± 0.55 dB (Max)
Averaging time	100 µs to 10 s
Resolution	0.01 dB
Number of trace points	1 to 1024 points per channel
Sample rate for trace	0.01 Hz to 12 kHz

Notes

1. Specifications are valid at 23 °C ± 3 °C.
2. +10 dBm to -40 dBm, 23 °C.
3. Excluding connectors.
4. < 10 dB attenuation.
5. At calibration wavelengths.
6. Preliminary specifications.
7. Advanced specifications, subject to change.
8. Quantifi Photonics multimode products are tested and calibrated using mode-conditioning setups defined in TIA EIA-455-43 FOTP-43 for Output Near-Field Radiation Patterns.


ORDERING INFORMATION

The VOA 1000 is available in the standard configurations listed below. If your application requires a different configuration, please contact your sales representative to discuss your requirements.

Available configurations:

VOA-1001-2-FC-PXIE
VOA-1001-2-FA-PXIE
VOA-1001-2-SA-PXIE
VOA-1002-2-FA-MTRQ
VOA-1002-2-FA-PXIE
VOA-1005-2-FA-MTRQ
VOA-1005-2-FA-PXIE
VOA-1102-2-FC-PXIE
VOA-1102-2-FA-PXIE
VOA-1102-2-FA-PXIE
VOA-1102-2-SA-PXIE
VOA-1301-2-FA-PXIE
VOA-1301-2-FA-MTRQ
VOA-1302-2-FA-PXIE

Configuration number format:

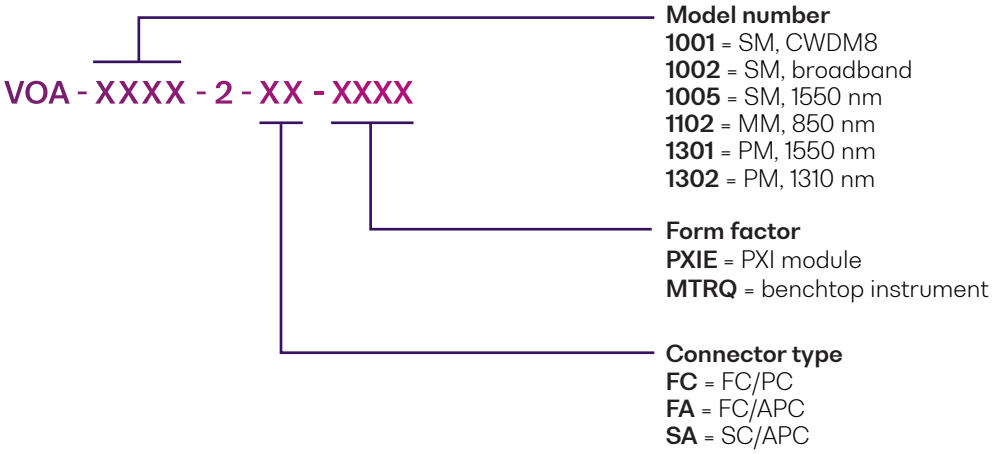

WARRANTY INFORMATION

This product comes with a standard 1 year warranty.

EXTENDED WARRANTIES AND CALIBRATION PLANS

With an **extended warranty and calibration plan** you'll spend more time focused on your priorities and less time worrying about maintenance.

Add a **3 or 5 year extended warranty** when you purchase your Quantifi Photonics instruments.



Guarantee performance

Ensure your equipment is operating at the best it can be for reliable and accurate results.

Lower cost of ownership

Lock in savings and maximise your testing budget with a lower base cost of ownership.

Peace of mind

Spend less time worrying about maintenance and more on generating results.

CALIBRATION PLANS FOR ADDITIONAL DISCOUNTS

Order a **calibration plan** when purchasing your Quantifi Photonics instruments and get additional discounts.

10% Discount On calibrations ordered at the time of purchase.

25% Discount Add on an extended warranty and receive a 25% discount on calibrations.

Over time and with regular use, all optical parts and connectors require re-calibration and maintenance to guarantee accurate and reliable performance. We recommend Quantifi Photonics optical instruments are re-calibrated every 12 months. With an instrument calibration performed by Quantifi Photonics technicians you receive:

- Comprehensive calibration to factory specifications
- End-to-end inspection to ensure all instrument functions are working and connectors are clean
- Firmware, software and documentation updates
- Certificate of calibration which includes detailed test results

How to do I **secure my extended warranty or calibration plan**?

Contact your Quantifi Photonics sales representative or email **sales@quantifiphotonics.com**

Extended warranties and calibration plans must be ordered at the time of purchase and are available only for Quantifi Photonics' products. The 25% calibration discount only applies to calibrations while the product is covered by the extended warranty period.

Versatile test modules for a wide range of requirements and applications.

Tunable Laser Source



Versatile telecom laser sources with full tunability across C or L bands. Narrow 100 kHz linewidth, up to 16.5 dBm of power, optional whisper mode to disable frequency dither.

Fixed Wavelength Laser Source



DFB laser sources available in a range of wavelengths and powers up to 24 dBm. Supports SMF, MMF and PMF.

Swept, Tunable Continuous Wave Laser



Swept, tunable continuous wave (CW) laser source with 0.01 dB power stability and 400 nm/s high-speed scan rate for R&D and production testing.

Superluminescent Diode Broadband Light Source



Super-luminescent LED light source with high output power, large bandwidth and low spectral ripple and various wavelengths.

ELSFP-Compliant External Laser Source



Uses ELSFP-compliant pluggable modules to provide 8 channels of CW optical power at 1310 nm up to 24 dBm.

Variable Optical Attenuator (VOA)



Fast attenuation speed with low insertion loss and built-in power monitoring. Operates in fixed attenuation or constant output power modes. Support SMF, MMF and PMF.

Polarization Controller & Scrambler



High-speed automated polarization control with broad wavelength coverage from 1260 to 1650 nm, low insertion loss and back reflection. Full remote control via intuitive GUI, LabVIEW or SCPI.

Optical Power Meter



Fast terminating or inline monitoring of optical signal power from -60 to +10 dBm across 750 to 1700 nm wavelengths. Model with logarithmic analog output for applications such as silicon photonics fiber alignment.

Optical Spectrum Analyzer (OSA)



Cost-effective, spectral measurement in a compact module with built-in analysis for: SMSR, OSNR & spectral width. Targeted wavelengths for specific applications in O band, C band & L band.

Optical-to-Electrical Converter



High bandwidth, broadband O-to-E converter. Choose from 1 or 2 channels, AC or DC coupling and various conversion gain and operating wavelength ranges.

Optical Switch



Proven reliability and fast switching time. Wide variety of switch configurations and models support SMF, MMF and PMF.

Photonic Doppler Velocimeter (PDV)



Purpose-built module for Photonic Doppler Velocimetry (PDV). A circulator, two VOAs and a passive coupler all built into one compact module.

Passive Component Integration



Integrate passive optical components of your choice such as WDM couplers, splitters, band-pass filters, PM beamsplitters and circulators. SMF, MMF and PMF.

Digital Sampling Oscilloscope (DSO)



Digital equivalent-time sampling oscilloscope (DSO) with high-quality precision timebase and low jitter mode, available in 1 or 2 channels in a compact benchtop instrument.

Clock Recovery Instrument (CDR)



Clock recovery instrument for the QCA Series. Low jitter design and precise phase-locking provide a reliable, scalable solution for high-speed communication testing.

Coherent Transmitter



Generate high-quality coherent optical signals for transmitter development, testing and advanced modulation research.

Coherent Receiver



High-performance coherent optical receiver for accurate measurement and characterization of coherent modulation formats.

VISIQ Analysis Software

Coherent signal analysis software for intuitive DSP configuration, signal analysis and optimization.

Test. Measure. Solve.™

Quantifi Photonics provides test solutions to help customers unlock scalable and cost-effective high-volume manufacturing of photonic integrated circuits (PICs), co-packaged optics and pluggable optics. The company's portfolio includes a wide range of photonic test instruments, and digital sampling oscilloscopes, available as benchtop or the industry-standard PXI format to support cost-effective, high-throughput design verification testing and high-volume manufacturing.

To find out more, get in touch with us today.

General Enquiries sales@quantifiphotonics.com
Technical Support support@quantifiphotonics.com
Phone - NZ +64 9 478 4849
Phone - USA +1-800-803-8872

quantifiphotonics.com

QUANTIFI PHOTONICS®
A Teradyne Company

Quantifi Photonics Ltd © 2026. All rights reserved. No part of this publication may be reproduced, adapted, or translated in any form or by any means without the prior permission from Quantifi Photonics Ltd. All specifications are subject to change without notice. Please contact Quantifi Photonics for the latest information.